

IMAGE




SPECIFICATION

Upholstery Available In Fabric or Leather
 Available C.O.M. / C.O.L.

Required Fabric For Upholstery: 0,99 Lm / 3.25 ft
 Required Leather For Upholstery: 1,54 Sq m / 16.58 ft²

Gross Weight: 21,90 Kg / 48.28 lb
 Volume: 0,31 Cbm / 10.95 ft³ (assembled backrest)
 0,23 Cbm / 8.12 ft³ (disassembled backrest)
 Box Dimensions: w 750 x d 710 x h 450/790 mm / w 29.53" x d 27.95" x
 h 17.72/31.10"
 1 per box
 HARMONIZED SYSTEM CODE 94013900

ROUGH-IN DRAWING

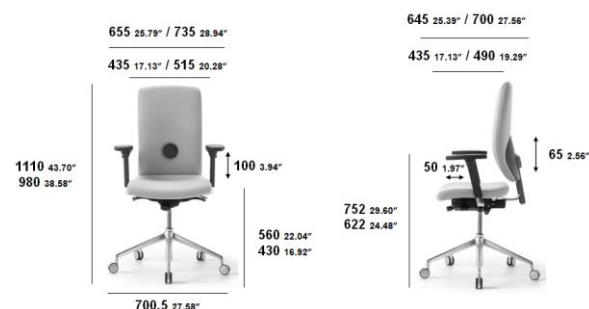

STANDARD FEATURES

INNER FRAME

Seat and backrest made of double radius stratified curved beech plywood, warm shaped, 14 mm thickness.

PADDING

Polyurethane resin ELAST PERFORMANCE characterized by "smart memory", that allows the armchair to recover the initial support even after long and strong pressure. Seat density 40 kg/mc EM, 5 mm thickness. Backrest density 35 kg/mc SE elastic non-deformable. Wadding 280 gr/Sq m. CFC-free.

REAR BACKREST

Backrest cover in plastic metallized non-reflecting in colour light grey 77/2 or grey anthracite 69/4 antiscratch and crushproof, with an elegant leaf pattern.

BASE

Swivel base, five-spoke, polished aluminium, 678 mm diameter. (Lead is present in the aluminum to a lesser extent <0.20%. The aluminum used complies with 2005/95/CE, 2002/69/CE and 2003/108/CE). Recyclability 100%. Available in black nylon and fiberglass. Design Hans Thyge.

MECHANISM

Synchronized mechanism with 100 mm backrest offset 5 locking positions 22° tilt of backrest 11° Seat tilt Wider spring: from 40 to 120 Kg Improved rotation point Wider backrest tilt : 22°. Side tension regulation. The mechanism is: - certified ISO 21015:2007, EN and BIFMA; - certified for 24 hour use and maximum weight of 150 kilo, in accordance with the norm BS 5459: Part 2:2000; - complies with USA Lead Paint Norm, 16 CFR Part 1303 12/21/2008. Adjustable backrest height 60 mm that allows a correct lumbar support to minimize stress to your backrest and lumbar discs. Mechanism for the regulation of the depth of the seat, with possibility of locking in 5 positions, Total adjustable slide 80 mm.

GAS LIFT

Pneumatic seat height adjustment, Gas lift column, CLASS 4 DIN 455, black epoxy-polyester powder coating.

ARMRESTS

Multifunctional arms 12° forward – adj. 4d. 100 mm height adjustment by the button, pad rotation in three positions or 180° by the button, 40 mm Pad translation, 45 mm width regulation. Depth adjustment 25 mm extension more by each side. soft touch arm-pad.

BACKREST

Backrest with steel blade, 7 mm thickness. Hand wheel located in the rear backrest for the regulation of the lumbar support, adjustable sliding system 60 mm.

CASTORS

Ø 60 mm Tyre Black, Without Brake, suitable for any type of flooring, thanks to the polyurethane rubber.

Available FSC® certified

COUNTRY OF PRODUCTION:

Italy

ENVIRONMENT:

Indoor

WARRANTY:

5 years

OTHERS

- Stitching's Are Made With Continuous Filament Polyester Thread With A Water Repellent Finish Made By Coats® Type Weaverbird™ This Type Of Lubricated Polyester (Tkt 010) Thread Make The Stitching Stronger, Resistant To The Abrasion, And Gives The Product More Tailoring Appearance. Allowing To Read The Forms And Design Of The Product
- All screws and assembly systems used in the production of Sitia's product are UNI EN ISO 9001-2000 and UNI ISO/TS 16949 process certified

Sitia srl Copyright 2023/2024 - all rights reserved. The described data could be modified without prior communication.