


IMAGE

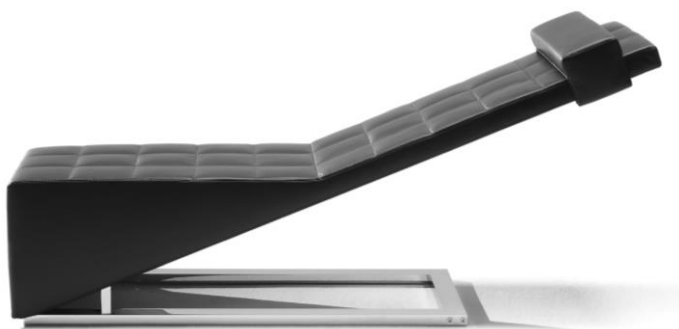


SPECIFICATION

Upholstery Available In Fabric or Leather
 Available C.O.M. / C.O.L.

Required Fabric For Upholstery: 2,97 Lm / 9.74 ft
 Required Leather For Upholstery: 6,05 Sq m / 65.12 ft²

Gross Weight: 125,20 kg / 276.02 lb
 Volume: 1,57 Cbm / 55.44 ft³
 Box Dimensions: w 2330 x d 910 x h 735 / 91.73" x 35.83" x 28.94"
 1 per box
 HARMONIZED SYSTEM CODE 94017100

ROUGH-IN DRAWING

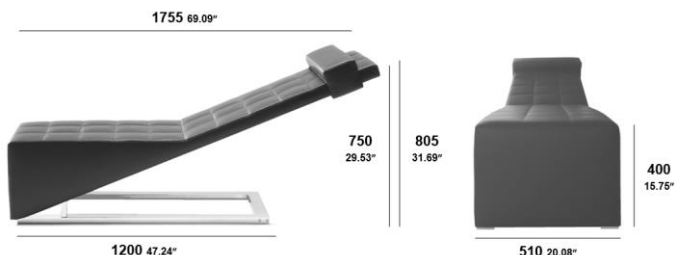

STANDARD FEATURES

INNER FRAME

Shaped frame made of bent rectangular-welded steel 34x40 mm, 3 mm thickness.
 Pressed, moulded 12 mm beech wood multilayer frame.

BASE

Drawn steel bars 60x30 mm, brass welded.

Frame finish: chromium plating, average thickness 25 microns, or embossed epoxy-polyester powder coating, with double coat anti-scratch treatment average thickness 50 microns.

PADDING

Cold-moulded polyurethane flexible foams, elasticity to the highest degree, non-deformability and comfort, 40 kg/m³ of density. Molded foam.
 Wadding on seat and backrest 280 gr/Sq m. CFC-free.

HEADREST UPHOLSTERY

Shaped foam made of flexible polyurethane, crushproof density 30 kg/m³. Wadding 180 gr/Sq m.

Adjustable headrest up and down.

GLIDES

Glides made of PTFE TEFLIFIT. Rubber base covered with PTFE. These glides guarantee softness, comfort and are able to cushion blows.
 Suitable for any type of floor, from parquet to tiles/marble, from linoleum to carpet.

Available FSC® certified

COUNTRY OF PRODUCTION:

Italy

ENVIRONMENT:

Indoor

WARRANTY:

10 years

OTHERS

- Stitching's Are Made With Continuous Filament Polyester Thread With A Water Repellent Finish Made By Coats® Type Weaverbird™ This Type Of Lubricated Polyester (Tkt 010) Thread Make The Stitching Stronger, Resistant To The Abrasion, And Gives The Product More Tailoring Appearance. Allowing To Read The Forms And Design Of The Product
- All screws and assembly systems used in the production of Sitia's product are UNI EN ISO 9001-2000 and UNI ISO/TS 16949 process certified.